

BEST VALUE OPTION



# beautifully warm floors

the affordable, safe & remarkably efficient heating option



New & Existing Homes



One System for All Coverings



Best-in-Class Thermostat



Tested for Compliance



enjoy superior comfort and astonishing savings  
from the best radiant floor heating system available

Fully Automated ● 100% Coverage ● Guaranteed Quality

## Comfort of Radiant Warmth


Heated floors will make all the difference to your new home or renovation project, running in rhythm with your routine to create living spaces that are exquisitely comfortable in any season.

Radiant heat is clean, effective and as natural feeling as sunshine. Warmth is delivered to the coldest parts of the body first, with breathe-easy temperatures maintained at eye level. You can expect a healthier home too: there are no drafts and a dry floor assists in alleviating mold, mildew and dust mites.

Energy conservation is central to Livella's philosophy. The included thermostat shares its smarts with towel warmers, demisters and lights to create a coordinated system that costs less to enjoy. It's a new way of thinking about your family's comfort and the added convenience could save you thousands.

## Tailor-Made for Superior Effect

Livella's flexible heating cables are fixed directly below tiles, timber, carpet and vinyl allowing heat to transfer rapidly into the room above. Fully automated and thermostatically controlled, warmth is delivered only when and where it's needed.

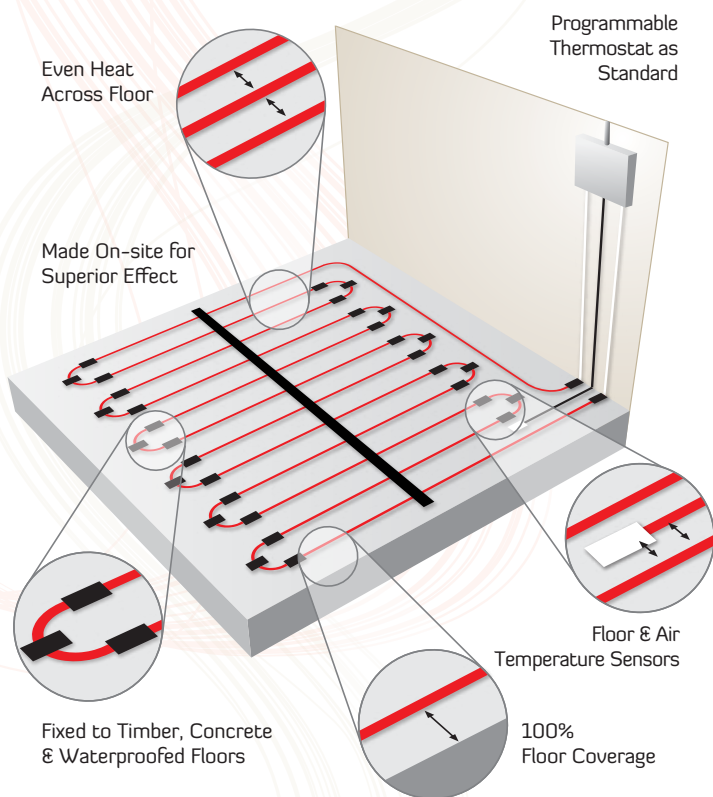

## Programmable thermostat

Deluxe LCD colour touch screen thermostat with appliance manager




## Sizing Guide

MODEL	COVERAGE	WATTS	LENGTH±
UF0200	1 – 1.6m <sup>2</sup>	200W	13m
UF0300	1 – 2.2m <sup>2</sup>	300W	20m
UF0400	2.2 – 3m <sup>2</sup>	400W	27m
UF0500	3 – 4m <sup>2</sup>	500W	33m
UF0650	4 – 5m <sup>2</sup>	650W	43m
UF0800	5 – 6m <sup>2</sup>	800W	53m
UF1000	6 – 7.5m <sup>2</sup>	1000W	67m
UF1250	7.5 – 9m <sup>2</sup>	1250W	83m
UF1500	9 – 11m <sup>2</sup>	1500W	100m
UF1800	11 – 13.5m <sup>2</sup>	1800W	120m
UF2000	13.5 – 16m <sup>2</sup>	2000W	133m
UF2500	16 – 20m <sup>2</sup>	2500W	167m
UF3000	20 – 24m <sup>2</sup>	3000W	200m

If the top of the finished floor covering is greater than 30mm from the floor heating cable then Livella should be consulted regarding the Wattage to be applied per square meter.

## Technical Specifications

<b>Voltage</b>	230-240V	<b>Lead Length</b>	3m
<b>Cable Diameter</b>	2.8mm	<b>Watts/Metre</b>	15
<b>Cold Lead Diameter</b>	6.0mm		
<b>Standards</b>	IEC 60800: 2009	<b>Ingress Protection Rating</b>	IPX7
<b>Cable Construction</b>	<ul style="list-style-type: none"> <li>Cable Sheath - Red PVC (105<sup>0</sup>)</li> <li>Primary Insulation - Fluoroplastic 200<sup>0</sup></li> </ul>	<ul style="list-style-type: none"> <li>Primary Screen - Tinned Copper Braid</li> <li>Conductor - Single</li> </ul>	

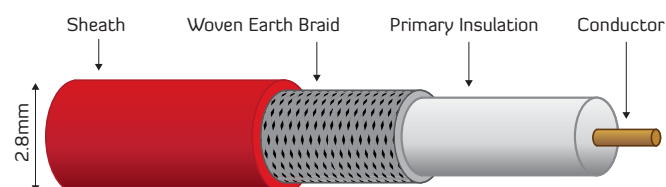

### Australia

PO Box 3929  
Robina Town Centre  
Queensland 4230

T: 1800 833 933  
F: 1800 133 134  
E: info@livella.com

### New Zealand

PO Box 35812  
Browns Bay  
North Shore City 0753

T: 0800 432 892  
F: 0800 443 289  
E: nz@livella.com



www.livella.com